210GT 10K Dually Gooseneck Tilt Deck

G.V.W.R	23,400#		**Electric Plug**	7-Way RV Style
Coupler	2 5/16" E-Z Adjustable Coupler		**Prep**	3-Step Acid Washed with Phosphorus Solution
Axles	Tandem 10,000# Dual Wheel (Oil-Bath)		**Primer**	Rust Resistant Epoxy Primer
Suspension	Multi-leaf Slipper Spring with Equalizer		**Paint**	High Solid Urethane
Tire	ST235/80R16 (10 ply)		**Pinstripes**	Painted Pinstripes
Wheel	16 x 6 Dual 8-bolt		**Overall Width**	102" wide (approx)
Frame	12", (19 lbs./ft.)		**Deck Height**	Approx. 38" standard
Neck	12" I-Beam		**Brakes**	Electric brakes on all axles
Crossmembers	3" Channel on 16" centers		**Steps**	Access Step on driver's side
Safety Chains	3/8' Heavy Duty with Safety Latch Hooks		**Storage**	Chain Basket between uprights
Jack	12,000# Spring Loaded Drop Leg Jack		**Wiring**	Front Mount in conduit
Side Rails	5" Angle Iron with Rub Rails & Stake Pockets		**Reflective Tape**	Required D.O.T. Reflective Taping
Stake Pockets	Formed Stake Pockets on 24" centers		**Safety**	Emergency Breakaway switch & battery backup
Floor	2" Pressure Treated Pine			
Lights	All LED Stop, Tail, Turn and Clearance			All specifications subject to change without notice.

Measurements

26' model shown (6 + 20)

Length	Tilt Deck	Front Deck	A	B	C
26	20'	6'	312	177"	38"
30	20'	10'	360	237"	38"

All measurements are approximate

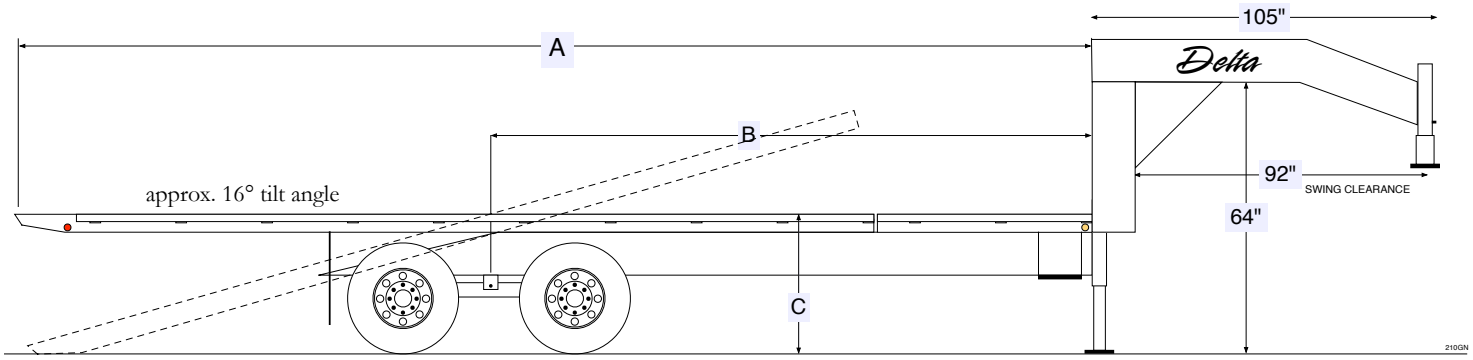

Suggested Retail Price

Model	Length	
210GT-26	26' (6 ft. Fixed Deck + 20 ft. Tilt Deck)	
210GT-30	30' (10 ft. Fixed Deck + 20 ft. Tilt Deck)	

210GT Options Pricing

Electric over Hydraulic Brakes		Torque Tube (helps minimize trailer twisting)	
Disc Brakes (Includes 10K HD) (must add elec/hyd. brake			
Dexter HD Adjustable Suspension (similar to Hutch)		Spare (Complete Tire & Wheel)	
Front Toolbox (between jacks) with lockable Lid			
Side Mount Toolbox with lid (18" x 14" x 36")		Upgrade 12K axles	
Extra Spring Loaded Jack (Dual Jacks)		Upgrade to 12", 22 lbs. I-Beam	
2-Speed Jack System (includes 2nd Jack)		Upgrade to 14-ply radial tires	
Pipe Spools (between Stake Pockets)		Upgrade to 17.5 tires (each tire)	
Full Power up/Down Hydraulic System (scissor hoist)			
Metal Floor (3/16" Diamondplate with crossmembers on 12" centers)			