


G.V.W.R	25,400#	ELECTRIC PLUG	7-Way RV Style
COUPLER	2 5/16" E-Z Adjustable Coupler	PREP	3-Step Acid Washed with Phosphorus Solution
AXLES	Tandem 12,000# Dual Wheel (Oil-Bath)	PRIMER	Rust Resistant Epoxy Primer
SUSPENSION	Multi-leaf Slipper Spring with Equalizer	PAINT	High Solid Urethane
TIRE	S/T235/80R16 (10 ply)	PINSTRIPES	Painted Pinstripes
WHEEL	16 x 6 Dual 8-bolt	OVERALL WIDTH	102" wide (approx)
FRAME	12" I-Beam	DECK HEIGHT	Approx. 38" standard
NECK	12" I-Beam	BRAKES	Electric brakes on all axles
CROSSMEMBERS	3" Channel on 16" centers	DOVE TAIL	Your choice of 3 different Dove Tail styles
SAFETY CHAINS	3/8" Heavy Duty with Safety Latch Hooks	STEPS	Access Step on driver's side
JACK	12,000# Spring Loaded Drop Leg Jack	STORAGE	Chain Basket between uprights
SIDE RAILS	5" Angle Iron with Rub Rails	WIRING	Front Mount in conduit
STAKE POCKETS	Formed Stake Pockets on 24" centers	REFLECTIVE TAPE	Required D.O.T. Reflective Taping
FLOOR	2" Pressure Treated Pine	SAFETY	Emergency Breakaway switch & battery backup
LIGHTS	All LED Stop, Tail, Turn and Clearance		All specifications subject to change without notice.

Measurements

when equipped with 5' dove tail

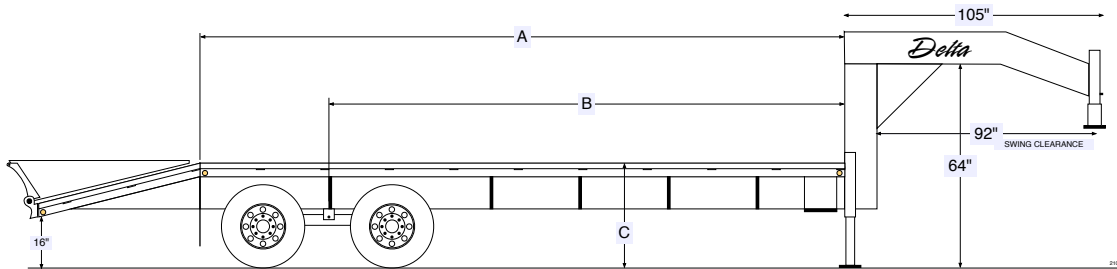

Length	A	B	C
16	132	128	38"
20	180	160	38"
22	204	176	38"
24	228	182"	38"
25	240	182"	38"
26	252	194"	38"
28	276	210"	38"
30	300	226"	38"
32	324	242"	38"
35	360	255"	38"
36	372	280"	38"
40	420	311"	38"
45	480	347"	38"

All measurements are approximate

SUGGESTED RETAIL PRICE

Model	Length
212GN-25	25'
212GN-28	28'
212GN-30	30'
212GN-32	32'
212GN-35	35'
212GN-40	40'

DOVE TAIL CHOICES

Dove Tail	Type	Description
DT 2	5' SELF-CLEANING includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron
		<i>Optional Center Ramp on Self-Cleaning Dove Tail</i>
DT 3	5' CENTER-LIFT includes 2 - 5' spring-assist Ramps with load-assist legs	Center platform raises automatically (with gas-pressure cylinder) so full dove tail is deck level when ramps are in stored position.
DTSR	SUPER RAMPS includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck
DT-S	STRAIGHT DECK	No dove tail, no ramps

Overall trailer length includes dove tail length

212GN OPTIONS PRICING

Electric over Hydraulic Brakes
Disc Brakes (must add elec/hyd. brake option)
Dexter HD Adjustable Suspension (similar to Hutch)
Front Toolbox (between jacks) with lockable Lid
Side Mount Toolbox with lid (18" x 14" x 36")
Extra Spring Loaded Jack (Dual Jacks)
2-Speed Jack System (includes 2nd Jack)
2-Hydraulic Jacks (includes separate pump & battery)
Deck over Gooseneck (welded-on) (96" x 72")
8' Slide-in Ramps (on Straight Deck trailer only - no dove tail)
Pipe Spools (between Stake Pockets)
Metal Floor (3/16" Diamondplate with crossmembers on 12" centers)

Torque Tube (helps minimize trailer twisting)
Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area
Spare (Complete Tire & Wheel)
Upgrade to 12", 22 lbs. I-Beam
Upgrade to 14-ply radial tires
Upgrade to 17.5 tires (each tire)
Weld-on or Sliding Winch
Ratchet Rail (per 6' length)
Diamondplate over Ramp Backs (per ramp) STD on Super Ramps
Extra 12K axle
Upgrade to 15K axles (tandem) with 17.5 Tires