212PH Tandem 12K Dually Pintle Ring

G.V.W.R	25,400#		**Electric Plug**	7-Way RV Style
Coupler	4-Bolt Adjustable Pintle Ring		**Prep**	3-Step Acid Washed with Phosphorus Solution
Axles	Tandem 12,000# Dual Wheel (Oil-Bath)		**Primer**	Rust Resistant Epoxy Primer
Suspension	Multi-leaf Slipper Spring with Equalizer		**Paint**	High Solid Urethane
Tire	ST235/80R16 (10 ply)		**Pinstripes**	Painted Pinstripes
Wheel	16 x 6 Dual 8-bolt		**Overall Width**	102" wide (approx)
Frame	12" I-Beam		**Deck Height**	Approx. 38" standard
Neck	12" I-Beam		**Brakes**	Electric brakes on all axles
Crossmembers	3" Channel on 16" centers		**Dove Tail**	Your choice of 3 different Dove Tail styles
Safety Chains	3/8' Heavy Duty with Safety Latch Hooks		**Steps**	Access Step on driver's side
Jack	12,000# Spring Loaded Drop Leg Jack		**Storage**	Chain Basket in A-Frame
Side Rails	5" Angle Iron with Rub Rails		**Wiring**	Front Mount in conduit
Stake Pockets	Formed Stake Pockets on 24" centers		**Reflective Tape**	Required D.O.T. Reflective Taping
Floor	2" Pressure Treated Pine		**Safety**	Emergency Breakaway switch & battery backup
Lights	All LED Stop, Tail, Turn and Clearance			All specifications subject to change without notice.

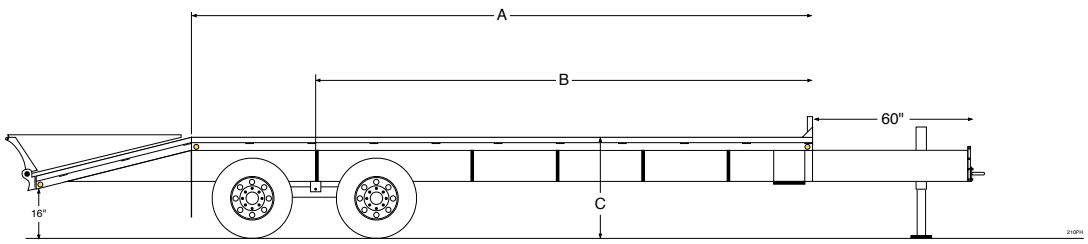

Measurements

when equipped with 5' dove tail

Length	A	B	C
16	132	122"	38"
20	180	154"	38"
22	204	170"	38"
24	228	176"	38"
25	240	176"	38"
26	252	188"	38"
28	276	204"	38"
30	300	220"	38"
32	324	236"	38"
35	360	249"	38"
36	372	274"	38"
40	420	311"	38"
45	480	347"	38"

All measurements are approximate

Suggested Retail Price

Model	Length	
212GN-25	25'	
212GN-28	28'	
212GN-30	30'	
212GN-32	32'	
212GN-35	35'	
212GN-40	40'	

Dove Tail	Type	Description	
DT 2	**5' Self-Cleaning** includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron	
		Optional Center Ramp on Self-Cleaning Dove Tail	
DT 3	**5' Center-Lift** includes 2 - 5' spring-assist Ramps with load-assist legs	Center platform raises automatically (with gas-pressure cylinder) so full dove tail is deck level when ramps are in stored position.	
DTSR	**Super Ramps** includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck	
DT-S	**Straight Deck**	No dove tail, no ramps	

Overall trailer length includes dove tail length

212PH Options Pricing

Electric over Hydraulic Brakes		Torque Tube (helps minimize trailer twisting)	
Disc Brakes (must add elec/hyd. brake option)		Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area	
Dexter HD Adjustable Suspension (similar to Hutch)		Spare (Complete Tire & Wheel)	
Front Toolbox (between jacks) with lockable Lid		Upgrade to 12", 22 lbs. I-Beam	
Side Mount Toolbox with lid (18" x 14" x 36")		Upgrade to 14-ply radial tires	
Extra Spring Loaded Jack (Dual Jacks)		Upgrade to 17.5 tires (each tire)	
2-Speed Jack System (includes 2nd Jack)		Weld-on or Sliding Winch	
2-Hydraulic Jacks (includes separate pump & battery)		Rachet Rail (per 6' length)	
8' Slide-in Ramps (on Straight Deck trailer only - no dove tail)		Diamondplate over Ramp Backs (per ramp) STD on Super Ramps	
Pipe Spools (between Stake Pockets)		Extra 12K axle	
Metal Floor (3/16" Diamondplate with crossmembers on 12" centers)		Upgrade to 15K axles (tandem) with 17.5 Tires	