

Bumper-Pull Model


G.V.W.R	14,000#	HYDRAULIC LIFT	Self-Contained Electric/Hydraulic Scissor Lift
COUPLER	2 5/16" Bulldog Coupler on Leveler Track	HYDRAULIC PUMP	Front Mount Pump & Battery inside toolbox
AXLES	Tandem 7,000# Single Wheel	CONTROL	Magnetic Control Unit
SUSPENSION	Multi-leaf Slipper Spring with Equalizer	DUMP BED SIDES	24" high, 10 gauge with integrated supports
BRAKES	Electric brakes on all axles	REAR GATE/DOOR	Combination Dump/Swing gate with Cam Latches
TIRE	ST235/80R16 (10 ply)	LOADING RAMPS	2 - 6 ft. Loading Ramps
WHEEL	16 x 6, 8-bolt Steel	LIGHTS	All LED Stop, Tail, Turn and Clearance
FRAME	2" x 5" Tubing	ELECTRIC PLUG	7-Way RV Style
TONGUE	5" Channel (double to 10")	PREP	3-Step Acid Washed with Phosphorus Solution
CROSSMEMBERS	3" Channel	PRIMER	Rust Resistant Epoxy Primer
BED CROSSMEMBERS	3" Channel on 12" centers	PAINT	High Solid Urethane
SAFETY CHAINS	Heavy Duty with Safety Latch Hooks	PINSTRIPES	Painted Pinstripes
JACK	12,000# Spring Loaded Drop Leg Jack	WIDTH	84" wide (approx.)
BED TIE DOWNS	4-Heavy Duty D-Rings	FLOOR HEIGHT	Approx. 29"
FLOOR	10 gauge smooth steel	STORAGE	Front Mounted Toolbox with Lid (in A-Frame)
FENDERS	Steel Diamondplate	WIRING	Front Mount in conduit
DUMP ANGLE	45 degree Dump Angle (max)	REFLECTIVE TAPE	Required D.O.T. Reflective Taping
TARP/MOUNT	Tarp Mount is Standard, Tarp Optional	SAFETY	Emergency Breakaway switch & battery backup
			All specifications subject to change without notice.

Features Heavy Duty 10 gauge sides AND Floor

Measurements

LENGTH	A	B	C
12	144"	81"	52"
14	168"	102"	52"
16	192"	108"	52"

All measurements are approximate

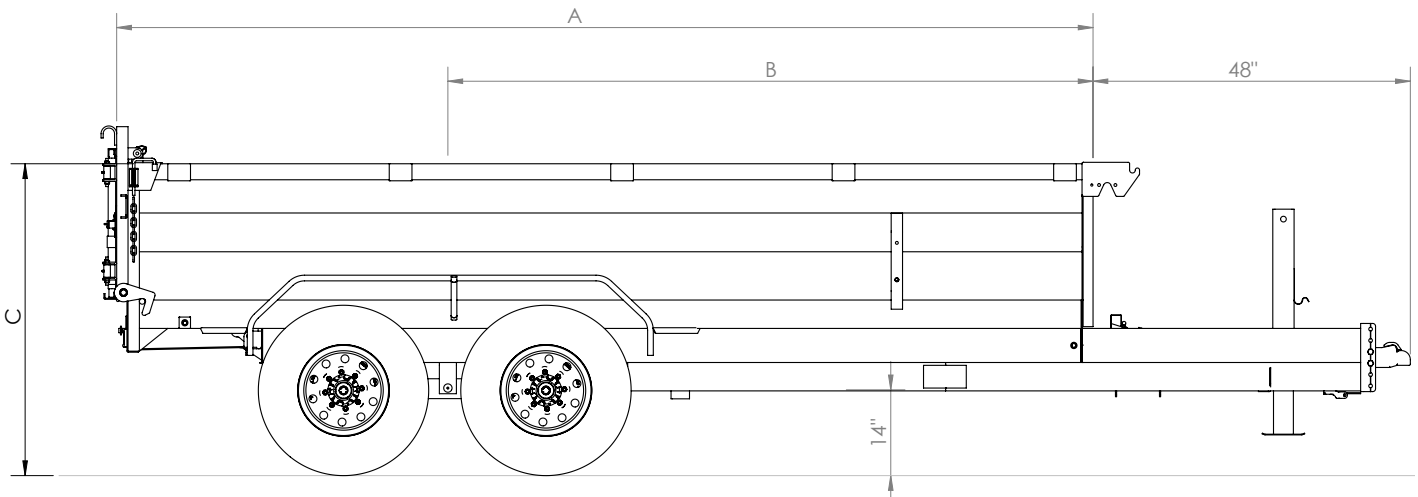

SUGGESTED RETAIL PRICE

Bumper Pull

Model	Length	Capacities
27NBD-12	12'	6.2 cubic yards
27NBD-14	14'	7.25 cubic yards
27NBD-16	16'	8.3 cubic yards

27NBD OPTIONS PRICING

Extra Spring Loaded Jack (Dual Jacks)		Spare (Complete Tire & Wheel)	
2-Speed Jack System (includes 2nd Jack)		Upgrade to 14-ply radial tires	
Debris Tarp		Upgrade to 17.5 tires (each tire)	
		Rear Stabilizer Drop Legs	