37GN Tri-Axle 7K Gooseneck

G.V.W.R	21,000#		**Electric Plug**	7-Way RV Style
Coupler	2 5/16" E-Z Adjustable Coupler		**Prep**	3-Step Acid Washed with Phosphorus Solution
Axles	Triple 7,000# Single Wheel		**Primer**	Rust Resistant Epoxy Primer
Suspension	Multi-leaf Slipper Spring with Equalizer		**Paint**	High Solid Urethane
Tire	ST235/80R16 (10 ply)		**Pinstripes**	Painted Pinstripes
Wheel	16 x 6 Single 8-bolt		**Overall Width**	102" wide (approx)
Frame	12" I-Beam		**Deck Height**	Approx. 38" standard
Neck	12" I-Beam		**Brakes**	Electric brakes on all axles
Crossmembers	3" Channel on 16" centers		**Dove Tail**	Your choice of 3 different Dove Tail styles
Safety Chains	3/8' Heavy Duty with Safety Latch Hooks		**Steps**	Access Step on driver's side
Jack	12,000# Spring Loaded Drop Leg Jack		**Storage**	Chain Basket between uprights
Side Rails	5" Angle Iron with Rub Rails		**Wiring**	Front Mount in conduit
Stake Pockets	Formed Stake Pockets on 24" centers		**Reflective Tape**	Required D.O.T. Reflective Taping
Floor	2" Pressure Treated Pine		**Safety**	Emergency Breakaway switch & battery backup
Lights	All LED Stop, Tail, Turn and Clearance			All specifications subject to change without notice.

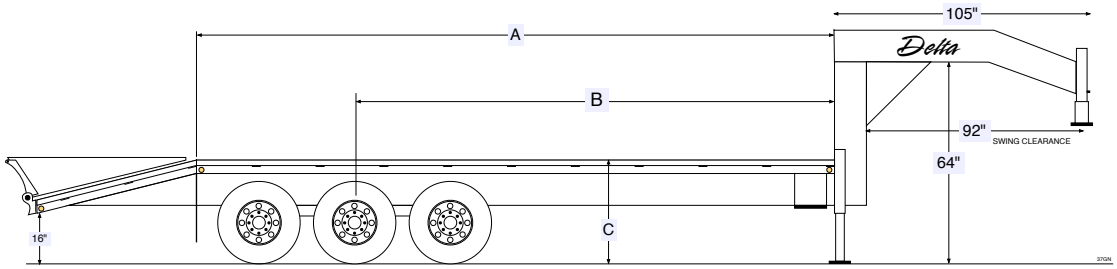

Measurements

when equipped with 5' dove tail

Length	A	B	C
25	240	200	38"
26	252	208	38"
28	276	224	38"
30	300	240	38"
32	324	256	38"
35	360	280	38"
38	396	304	38"
40	420	320	38"
45	480	360	38"

All measurements are approximate

Suggested Retail Price

Model	Length	
37GN-25	25'	
37GN-28	28'	
37GN-30	30'	
37GN-32	32'	
37GN-35	35'	
37GN-38	38'	
37GN-40	40'	
37GN-45	45'	

Dove Tail Choices

Dove Tail	Type	Description	
DT 2	**5' Self-Cleaning** includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron	
		Optional Center Ramp on Self-Cleaning Dove Tail	
DT 3	**5' Center-Lift** includes 2 - 5' spring-assist Ramps with load-assist legs	Center platform raises automatically (with gas-pressure cylinder) so full dove tail is deck level when ramps are in stored position.	
DTSR	**Super Ramps** includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck	
DT-S	**Straight Deck**	No dove tail, no ramps	

Overall trailer length includes dove tail length

37GN Options Pricing

Electric over Hydraulic Brakes		Torque Tube (helps minimize trailer twisting)	
Lid for Chain Basket		Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area	
Side Mount Toolbox with lid		Metal Floor (3/16" Diamondplate with crossmembers on 12"	
Extra Spring Loaded Jack (Dual Jacks)		Spare (Complete Tire & Wheel)	
2-Speed Jack System (includes 2nd Jack)		Upgrade to 14-ply radial tires	
8' Slide-in Ramps (on Straight Deck trailer only - no dove tail)		Upgrade to 17.5 tires (each tire)	
Full Deck over Gooseneck		Steel Diamondplate over Ramp Backs (per ramp)	
Pipe Spools (between Stake Pockets)			
8,000# Axle upgrade (spring)			