210GN Tandem 10K Dually Gooseneck

G.V.W.R	23,400#		**Electric Plug**	7-Way RV Style
Coupler	2 5/16" E-Z Adjustable Coupler		**Prep**	3-Step Acid Washed with Phosphorus Solution
Axles	Tandem 10,000# Dual Wheel (Oil-Bath)		**Primer**	Rust Resistant Epoxy Primer
Suspension	Multi-leaf Slipper Spring with Equalizer		**Paint**	High Solid Urethane
Tire	ST235/80R16 (10 ply)		**Pinstripes**	Painted Pinstripes
Wheel	16 x 6 Dual 8-bolt		**Overall Width**	102" wide (approx)
Frame	12" I-Beam		**Deck Height**	Approx. 38" standard
Neck	12" I-Beam		**Brakes**	Electric brakes on all axles
Crossmembers	3" Channel on 16" centers		**Dove Tail**	Your choice of 3 different Dove Tail styles
Safety Chains	3/8' Heavy Duty with Safety Latch Hooks		**Steps**	Access Step on driver's side
Jack	12,000# Spring Loaded Drop Leg Jack		**Storage**	Chain Basket between uprights
Side Rails	5" Angle Iron with Rub Rails		**Wiring**	Front Mount in conduit
Stake Pockets	Formed Stake Pockets on 24" centers		**Reflective Tape**	Required D.O.T. Reflective Taping
Floor	2" Pressure Treated Pine		**Safety**	Emergency Breakaway switch & battery backup
Lights	All LED Stop, Tail, Turn and Clearance			All specifications subject to change without notice.

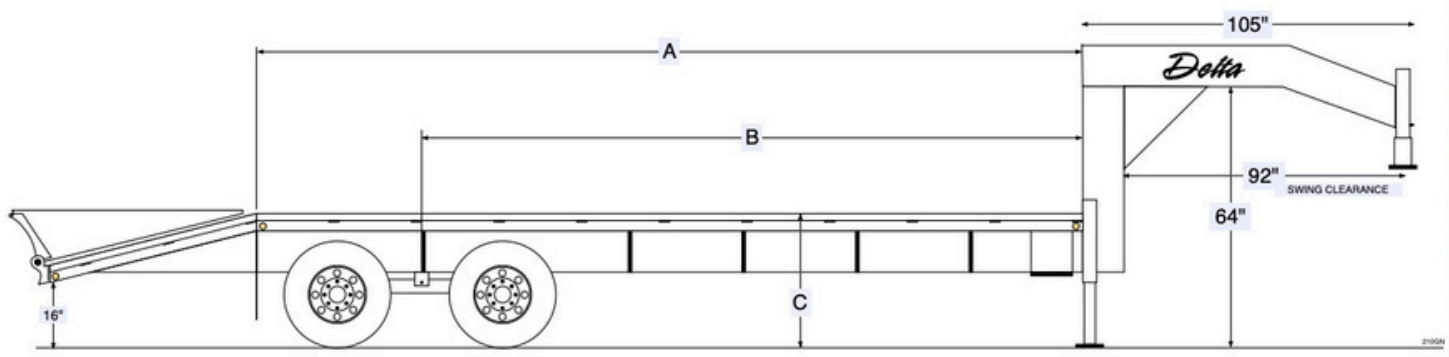

Measurements

when equipped with 5' dove tail

Length	A	B	C
20	180	160	38"
22	204	176	38"
24	228	182"	38"
25	240	182"	38"
26	252	194"	38"
28	276	210"	38"
30	300	226"	38"
32	324	242"	38"
35	360	255"	38"
36	372	286"	38"
40	420	311"	38"
45	480	347"	38"

All measurements are approximate

Suggested Retail Price

Model	Length	
210GN-25	25'	
210GN-28	28'	
210GN-30	30'	
210GN-32	32'	
210GN-35	35'	
210GN-40	40'	

Dove Tail Choices

Dove Tail	Type	Description	
DT 2	**5' Self-Cleaning** includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron	
DTSR	**Super Ramps** includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck	
DT-S	**Straight Deck**	No dove tail, no ramps	

Overall trailer length includes dove tail length

210GN Options Pricing

Electric over Hydraulic Brakes		Torque Tube (helps minimize trailer twisting)	
Disc Brakes (Includes 10K HD) (must add elec/hyd. brake		Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area	
Dexter HD Adjustable Suspension (similar to Hutch)		Spare (Complete Tire & Wheel)	
Front Toolbox (between jacks) with lockable Lid		Upgrade to 12", 22 lbs. I-Beam	
Side Mount Toolbox with lid (18" x 14" x 36")		Upgrade to 14-ply radial tires	
Extra Spring Loaded Jack (Dual Jacks)		Upgrade to 17.5 tires (each tire)	
2-Speed Jack System (includes 2nd Jack)		Weld-on or Sliding Winch	
2-Hydraulic Jacks (includes separate pump & battery)		Rachet Rail (per 6' length)	
Deck over Gooseneck (welded-on) (96" x 72")		Diamondplate over Ramp Backs (per ramp) STD on Super Ramps	
8' Slide-in Ramps (on Straight Deck trailer only - no dove tail)		Extra 10K axle	
Pipe Spools (between Stake Pockets)			
Metal Floor (3/16" Diamondplate with crossmembers on 12" centers)			

App Store