# 212GN Tandem 12K Dually Gooseneck

| | | | | |
|---|---|---|---|---|
| **G.V.W.R** | 25,400# | | **Electric Plug** | 7-Way RV Style |
| **Coupler** | 2 5/16" E-Z Adjustable Coupler | | **Prep** | 3-Step Acid Washed with Phosphorus Solution |
| **Axles** | Tandem 12,000# Dual Wheel (Oil-Bath) | | **Primer** | Rust Resistant Epoxy Primer |
| **Suspension** | Multi-leaf Slipper Spring with Equalizer | | **Paint** | High Solid Urethane |
| **Tire** | ST235/80R16 (10 ply) | | **Pinstripes** | Painted Pinstripes |
| **Wheel** | 16 x 6 Dual 8-bolt | | **Overall Width** | 102" wide (approx) |
| **Frame** | 12" I-Beam | | **Deck Height** | Approx. 38" standard |
| **Neck** | 12" I-Beam | | **Brakes** | Electric brakes on all axles |
| **Crossmembers** | 3" Channel on 16" centers | | **Dove Tail** | Your choice of 3 different Dove Tail styles |
| **Safety Chains** | 3/8' Heavy Duty with Safety Latch Hooks | | **Steps** | Access Step on driver's side |
| **Jack** | 12,000# Spring Loaded Drop Leg Jack | | **Storage** | Chain Basket between uprights |
| **Side Rails** | 5" Angle Iron with Rub Rails | | **Wiring** | Front Mount in conduit |
| **Stake Pockets** | Formed Stake Pockets on 24" centers | | **Reflective Tape** | Required D.O.T. Reflective Taping |
| **Floor** | 2" Pressure Treated Pine | | **Safety** | Emergency Breakaway switch & battery backup |
| **Lights** | All LED Stop, Tail, Turn and Clearance | | | All specifications subject to change without notice. |

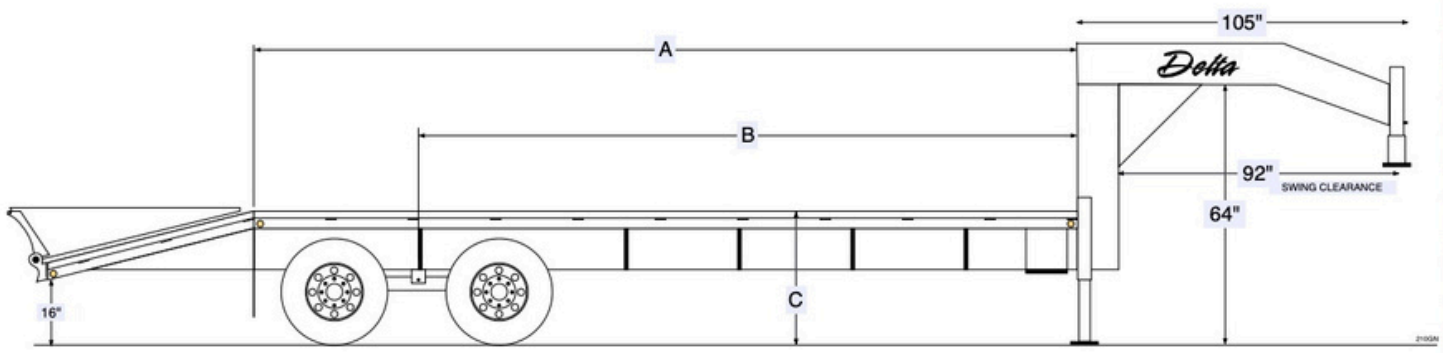


## Measurements

*when equipped with 5' dove tail*

| Length | A | B | C |
|---|---|---|---|
| 16 | 132 | 128 | 38" |
| 20 | 180 | 160 | 38" |
| 22 | 204 | 176 | 38" |
| 24 | 228 | 182" | 38" |
| 25 | 240 | 182" | 38" |
| 26 | 252 | 194" | 38" |
| 28 | 276 | 210" | 38" |
| 30 | 300 | 226" | 38" |
| 32 | 324 | 242" | 38" |
| 35 | 360 | 255" | 38" |
| 36 | 372 | 280" | 38" |
| 40 | 420 | 311" | 38" |
| 45 | 480 | 347" | 38" |

*All measurements are approximate*

## Suggested Retail Price

| Model | Length | |
|---|---|---|
| 212GN-25 | 25' | |
| 212GN-28 | 28' | |
| 212GN-30 | 30' | |
| 212GN-32 | 32' | |
| 212GN-35 | 35' | |
| 212GN-40 | 40' | |

## Dove Tail Choices

| Dove Tail | Type | Description | |
|---|---|---|---|
| DT 2 | **5' Self-Cleaning** includes 2 - 5' spring-assist Ramps with load-assist legs | Full dove tail constructed of angle iron | |
| DTSR | **Super Ramps** includes 2 - 5' extra wide spring-assist Ramps | 2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck | |
| DT-S | **Straight Deck** | No dove tail, no ramps | |

*Overall trailer length includes dove tail length*

## 212GN Options Pricing

| | | | |
|---|---|---|---|
| Electric over Hydraulic Brakes | | Torque Tube (helps minimize trailer twisting) | |
| Disc Brakes (must add elec/hyd. brake option) | | Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area | |
| Dexter HD Adjustable Suspension (similar to Hutch) | | Spare (Complete Tire & Wheel) | |
| Front Toolbox (between jacks) with lockable Lid | | Upgrade to 12", 22 lbs. I-Beam | |
| Side Mount Toolbox with lid (18" x 14" x 36") | | Upgrade to 14-ply radial tires | |
| Extra Spring Loaded Jack (Dual Jacks) | | Upgrade to 17.5 tires (each tire) | |
| 2-Speed Jack System (includes 2nd Jack) | | Weld-on or Sliding Winch | |
| 2-Hydraulic Jacks (includes separate pump & battery) | | Rachet Rail (per 6' length) | |
| Deck over Gooseneck (welded-on) (96" x 72") | | Diamondplate over Ramp Backs (per ramp) STD on Super Ramps | |
| 8' Slide-in Ramps (on Straight Deck trailer only - no dove tail) | | Extra 12K axle | |
| Pipe Spools (between Stake Pockets) | | Upgrade to 15K axles (tandem) with 17.5 Tires | |
| Metal Floor (3/16" Diamondplate with crossmembers on 12" centers) | | | |