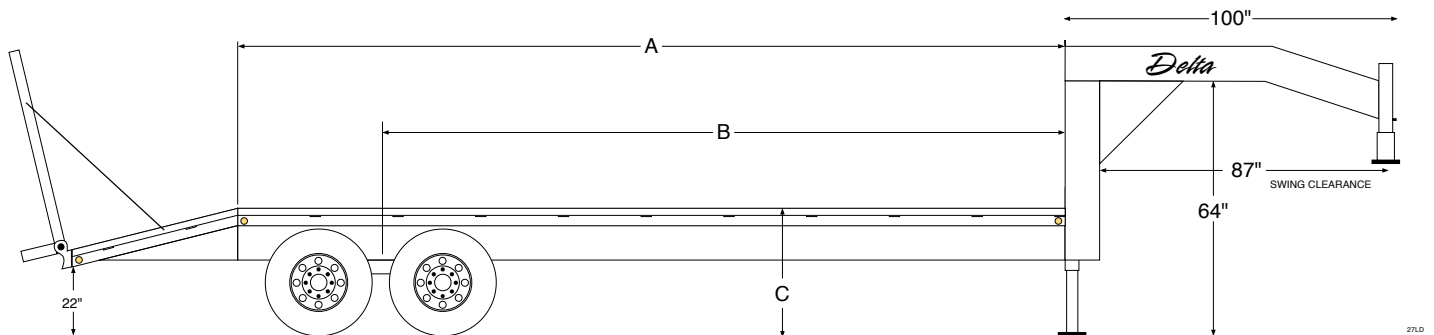


27LD**Light Duty - Tandem 7K Axle Gooseneck**

G.V.W.R	14,000 #	ELECTRIC PLUG	7-Way RV Style
COUPLER	2 5/16" E-Z Adjustable Coupler	PREP	3-Step Acid Washed with Phosphorus Solution
AXLES	Tandem 7,000# Single Wheel	PRIMER	Dupont Primer
SUSPENSION	Eye-to-Eye Springs with Equalizer	PAINT	Dupont Automotive-grade Acrylic Enamel
TIRE	ST235/80R16 (10 ply)	PINSTRIPES	Painted Pinstripes
WHEEL	16 x 6, 8-bolt	OVERALL WIDTH	102" wide (approx)
FRAME	10" I-Beam (12 lbs./ft.)	DECK HEIGHT	Approx. 36"
NECK	10" I-Beam (12 lbs./ft.)	BRAKES	Electric brakes on all axles
CROSSMEMBERS	3" Channel on 24" centers	DOVE TAIL	4' Self-Cleaning Dove Tail with 2 Ramps
SAFETY CHAINS	3/8" Heavy Duty with Safety Latch Hooks	WIRING	Front Mount in conduit
JACK	12,000# Spring Loaded Drop Leg Jack	REFLECTIVE TAPE	Required D.O.T. Reflective Taping
SIDE RAILS	5" Angle Iron with Rub Rails	SAFETY	Emergency Breakaway switch & battery backup
STAKE POCKETS	Formed Stake Pockets on 24" centers		
FLOOR	2" Pressure Treated Pine		
LIGHTS	All LED Stop, Tail, Turn and Clearance		All specifications subject to change without notice.

Measurements*24' model shown*

Length	A	B	C
16	144	126"	36"
18	168	138"	36"
20	192	150"	36"
22	216	162"	36"
24	240	174"	36"

All measurements are approximate**SUGGESTED RETAIL PRICE**

Model	Length	MSRP
27LD-16	16'	\$4,705
27LD-18	18'	\$4,934
27LD-20	20'	\$5,163
27LD-22	22'	\$5,401
27LD-24	24'	\$5,569

STANDARD DOVE TAIL

Dove Tail	Description	MSRP
4' SELF CLEANING includes 2 - 5' Ramps constructed of 3" channel	Full dove tail constructed of angle iron	N/C
STRAIGHT DECK	No dove tail, no ramps	N/C

*Overall trailer length includes dove tail length***27LD OPTIONS PRICING**

No Deduct for No Dove Tail and No Ramps (Straight Deck)	\$0
Extra Spring Loaded Jack (Dual Jacks)	\$207
2-Speed Jack System (includes 2nd Jack)	\$375

Spare Wheel	\$69
Spare (Complete Tire & Wheel)	\$222
Paint Underside of Trailer	\$100
Shrinkwrap Electrical Connections	\$76