210GD 10-Ton Heavy Duty Gooseneck Dump Trailer

Gooseneck Model

G.V.W.R	20,000#		**Hydraulic Lift**	Self-Contained Electric/Hydraulic Scissor Lift
Coupler	2 5/16" Bulldog Adjustable Gooseneck Coupler		**Hydraulic Pump**	Front Mount Pump & Battery inside toolbox
Axles	Tandem 10,000# Dual Wheel		**Control**	Magnetic Control Unit
Suspension	Multi-leaf Slipper Spring with Equalizer		**Dump Bed Sides**	48" high, 12 gauge smooth steel
Brakes	Electric brakes on all axles		**Rear Gate/Door**	Combination Dump/Swing gate with Cam Latches
Tire	ST235/80R16 (10 ply)		**Loading Ramps**	None
Wheel	16 x 6, 8-bolt Steel		**Lights**	All LED Stop, Tail, Turn and Clearance
Frame	12" I-Beam (19 lbs./ft.)		**Electric Plug**	7-Way RV Style
Gooseneck	12" I-Beam (19 lbs./ft.)		**Prep**	3-Step Acid Washed with Phosphorus Solution
Crossmembers	3" Channel on 16" centers		**Primer**	Rust Resistant Epoxy Primer
Bed Crossmembers	3" Channel on 12" centers		**Paint**	High Solid Urethane
Bed Long Sils	3" Channel		**Pinstripes**	Painted Pinstripes
Safety Chains	Heavy Duty with Safety Latch Hooks		**Width**	96" wide (approx.)
Jack	Twin 12,000# Spring Loaded Drop Leg Jacks		**Floor Height**	Approx. 33"
Bed tie Downs	4-Heavy Duty D-Rings		**Wiring**	Front Mount in conduit
Floor	3/16" smooth steel		**Reflective Tape**	Required D.O.T. Reflective Taping
Fenders	none		**Safety**	Emergency Breakaway switch & battery backup
Toolbox	Front Mount toolbox with lid between jacks		**Tarp/Mount**	Tarp Mount is Standard, Tarp Optional
Dump Angle	45 degree Dump Angle (max)			All specifications subject to change without notice.

Measurements

Length	A	B	C
16	192	118	33"
18	216	142	33"
20	240	166	33"

All measurements are approximate

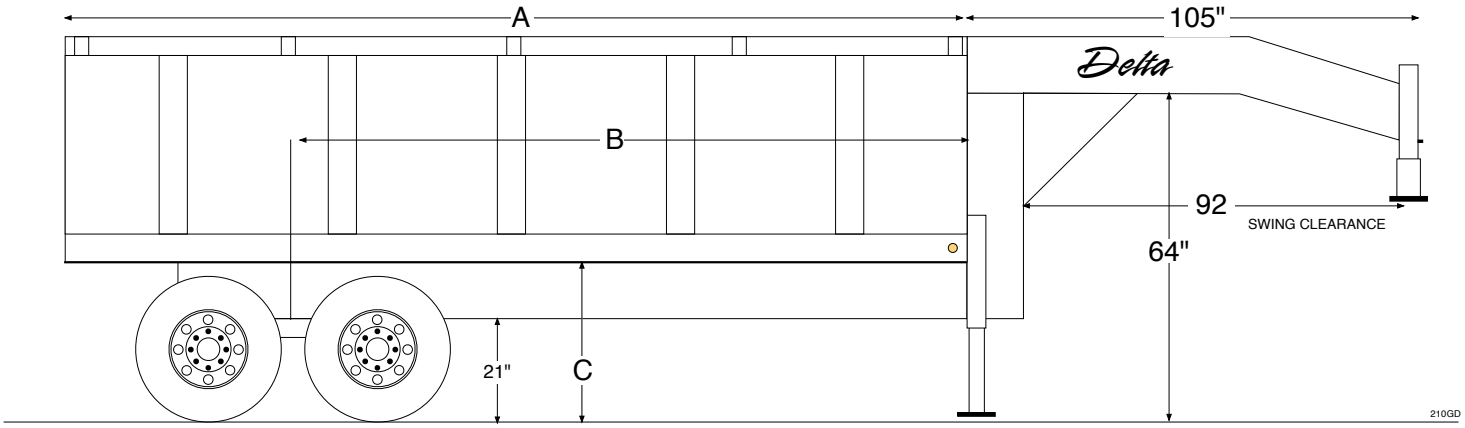

Suggested Retail Price

Gooseneck

Model	Length	Capacities	
210GD-16	16'	18.8 cubic yards	
210GD-18	18'	21.3 cubic yards	
210GD-20	20'	23.7 cubic yards	

210GD Options Pricing

2-Speed Jack System (trailer comes with 2 standard jacks)		Spare (Complete Tire & Wheel)	
12K axle Upgrade		Upgrade to 14-ply radial tires	
Debris Tarp		Upgrade to 17.5 tires (each tire)	
		Rear Stabilizer Drop Legs	